



Undercounter ice maker up to 25 kg - Sprayer system

Hotel	████████████████████
Restaurant	████████████████████
Fast food	████████████████████
Bar	████████████████████
Disco	████████████████████
Fish market	████████████████████
Supermarket	████████████████████
Medical & SPA	████████████████████
Industry	████████████████████

► Position n°



► Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Tropical class +43°C
- Cleanable antiscala filter
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Standard and special voltages
- Patented sprayer slide
- Fresh water dispenser



AISI 304 SS Scotch Brite finish



Cleanable antiscala filter



Patented sprayer slide



Fresh water dispenser

► Available ice cube size



► Prod. 24h

Temp. (°C)	Air temp.		Water temp.		kg	lbs
	10° C	50° F	10° C	50° F	25	55
	21° C	70° F	15° C	60° F	22	49

2 Years Warranty
subject to limitations

► Certifications available for this model






Ice Cube

Fresh Maker



Undercounter ice maker up to 25 kg - Sprayer system

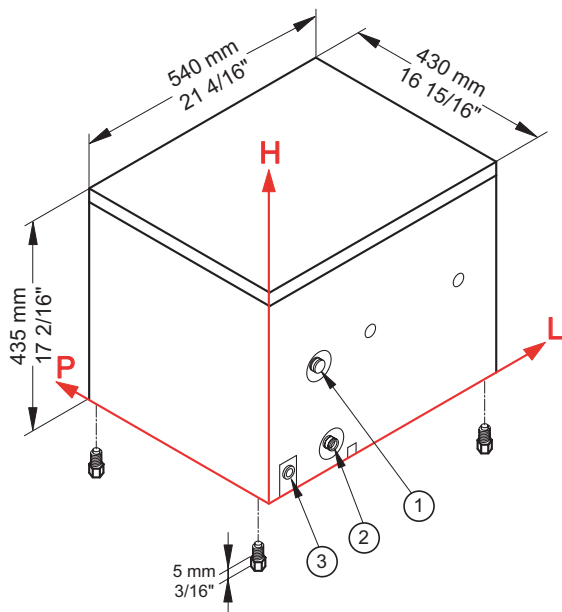

► Working conditions

- Location: **Indoor**

	Min	Max
Ambient temperature	+10° C / +50° F	+43° C / 110° F
Water temperature	+3° C / +37° F	+32° C / +90° F
Voltage	-10%	+10%
Water inlet pressure	1bar (14 psi)	6bar (84 psi)

► Performances

	Water temperature						
		10° C	50° F	15° C	60° F	21° C	70° F
Air temperature	10° C	25 kg					
	50° F		55 lbs				
	21° C			22 kg			
	70° F				49 lbs		
	32° C					18 kg	
	90° F						40 lbs

► Connections

All measures are referred to the rear bottom-left corner (L-H-Ø)

- ① Water in.: 120 mm / 4 12/16" - 215 mm / 8 7/16" - 3/4" ② Water out.: 150 mm / 5 14/16" - 40 mm / 1 9/16" - 24 mm / 15/16"
 ③ Electrical connections: 44 mm / 1 12/16" - 40 mm / 1 9/16"

► Technical information

Production in 24h	22 kg / 49 lbs	Water consumption	W: 37,4 l/kg - 448,1 gal/100 lbs
Store capacity, up to	4 kg / 9 lbs	Sizes (L-P-H mm)	540 - 430 - 435
Cooling system	W	(L-P-H in)	21 4/16 - 16 15/16 - 17 2/16
Kind of cube	D-13g	Sizes with pack (L-P-H mm)	590 - 490 - 640
Refrigerant	R404A	(L-P-H in)	23 4/16 - 19 5/16 - 25 3/16
Standard voltage	220-240 V ~ 50 Hz	Net weight	37,5 kg / 83 lbs
Electrical consumption	320 W	Gross weight	42,5 kg / 94 lbs
Fuse	10 A	Finish	AISI 304 stainless steel, scotch brite
Delivered water	1,2 l/min		

All the technical information must be considered at the following conditions:

Sizes without feet
 Standard Cube (13 g)
 Ambient temperature +21° C
 Water temperature +15° C
 Electrical consumption at +43° C (standard voltage)

Models and specifications are subject to change without notice

Rev. 01 - Issued January 2016



BREMA ICE MAKERS SPA

Via dell'Industria 10,
 20020 Villa Cortese (MI), Italy

tel. +39 0331 434811
 fax +39 0331 433833

www.bremaice.it
info@bremaice.it

Bim + Data
 download



We are Brema

