



# QRG

## Quick Reference Guide

### USA Market



#### R290



# WE ARE BREMA

*MAKING ICE IS OUR BUSINESS*

*Since 1985  
we have considered ice  
as an evolution of water,  
designing it into forms  
suitable to meet every need.*



# Be Certified

**Quality in Brema Ice Makers,  
as well as recognized, is also certified.**

*An important result that guarantees  
safety and reliability,  
in the most varied climatic conditions.*

*Because the rigorous choice of materials,  
attention and care to details represent  
a universal language.*

*To ensure compliance of our products  
to high standards of quality, health and  
security Brema Ice Makers has achieved  
certifications according to the standards  
**UNI EN ISO 9001:2015 and UNI EN ISO 45001:2018.***

*In addition to **CE** mark, the entire  
product range has obtained the  
**TÜV Rheinland** validation.*

*During the years, Brema ice machines  
has conquered **NSF, ETL Listed, ETL Sanitation,  
DOE, EAC, KC, UKR, S-Mark, RCM  
and WaterMark** approvals.*

*In addition, in 2017 we were the first company in  
the professional ice business to receive the **MOCA**  
certification from **ICIM**.*



# Be Eco-Active

**We wish to contribute  
with our choices  
to a more eco-sustainable future.**

*For this reason we project  
professional ice machines  
«designed for the environment».*

## **Cool by nature**

*Zero ozone depletion potential  
Excellent thermodynamic properties  
Energy efficiency*

**We have committed ourselves to the  
responsible use of natural resources, the  
development of clean technologies and the  
replacement of harmful substances with  
eco friendly alternatives.**



# Ice Cube



## THE COLD TASTE OF FLAVOR


A timeless classic with unmistakable transparency.

A refined shape that strikes at first glance, a harmonious sound when it falls into the glass.

When coldness is transformed into elegance and refinement, without sacrificing taste.

Cocktails love it for its ability to enhance even the most eclectic flavors.

Its sinuous shape makes it suitable for any type of glass.

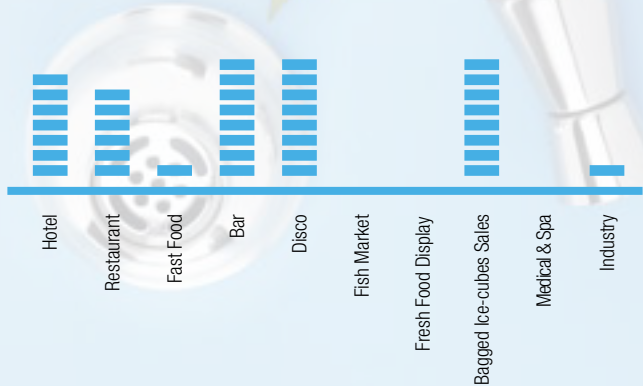

CB 249A HC USA


### Daily production up to 82 lb Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



#### Technical information

Production 24h*	65 lb
Storage capacity	up to: 20 lb
Cooling system	A
Kind of cube	D - 0.46 oz
Refrigerant	R290
Average power consumption**	320 W
Net weight	82 lb
Gross weight	97 lb
Fuse	10 A



Water consumption	29,2 gal/100lb
Sizes (WxDxH) *	15 6/16" x 18 2/16" x 27 3/16"
Sizes with pack (WxDxH)	17 5/16" x 20 8/16" x 34 10/16"
Finish	AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 6/16" - 6 14/16" - 3/4"
- ② Water out: 1 15/16" - 5 2/16" - 15/16"
- ③ Electrical connections: 6 2/16" - 8 5/16"



Installation

Standard Voltage 115 V ~ 60 Hz  
\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F  
• Foot 3/16"

## CB 316A HC USA


### Daily production up to 90 lb Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



#### Technical information

Production 24h*	80 lb
Storage capacity	up to: 35 lb
Cooling system	A
Kind of cube	D - 0.46 oz
Refrigerant	R290
Average power consumption**	325 W
Net weight	106 lb
Gross weight	123 lb
Fuse	10 A



Water consumption

29,2 gal/100 lb

Sizes (WxDxH) \*

19 11/16" x 22 13/16" x 27 3/16"

Sizes with pack (WxDxH)

21 10/16" x 24 13/16" x 34 10/16"

Finish

AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 6/16" - 7 11/16" - 3/4"
- ② Water out: 1 15/16" - 5 15/16" - 15/16"
- ③ Electrical connections: 6 2/16" - 9 2/16"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"

## CB 425A HC USA


### Daily production up to 110 lb Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



#### Technical information

Production 24h*	90 lb
Storage capacity	up to: 55 lb
Cooling system	A
Kind of cube	D - 0.46 oz
Refrigerant	R290
Average power consumption**	380 W
Net weight	123 lb
Gross weight	141 lb
Fuse	10 A



Water consumption

37,6 gal/100 lb

Sizes (WxDxH) \*

19 11/16" x 22 13/16" x 31 8/16"

Sizes with pack (WxDxH)

21 10/16" x 24 13/16" x 39"

Finish

AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 6/16" - 7 11/16" - 3/4"
- ② Water out: 1 15/16" - 5 15/16" - 15/16"
- ③ Electrical connections: 6 2/16" - 9 2/16"



Installation

Standard Voltage 115 V ~ 60 Hz


\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"

## CB 640A HC USA

### Daily production up to 160 lb Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



#### Technical information

Production 24h*	140 lb
Storage capacity	up to: 88 lb
Cooling system	A
Kind of cube	D - 0.46 oz
Refrigerant	R290
Average power consumption**	520 W
Net weight	170 lb
Gross weight	196 lb
Fuse	15 A

Water consumption

25,2 gal/100 lb

Sizes (WxDxH) \*

29 1/16" x 23 10/16" x 36 4/16"

Sizes with pack (WxDxH)

30 11/16" x 25 3/16" x 42 11/16"

Finish

AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 9/16" - 11 4/16" - 3/4"
- ② Water out: 2 2/16" - 9 10/16" - 15/16"
- ③ Electrical connections: 6 5/16" - 12 10/16"



Installation

Standard Voltage 115 V ~ 60 Hz


\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"

## CB 674A HC USA

### Daily production up to 160 lb Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



#### Technical information

Production 24h*	140 lb
Storage capacity	up to: 88 lb
Cooling system	A
Kind of cube	D - 0.46 oz
Refrigerant	R290
Average power consumption**	520 W
Net weight	159 lb
Gross weight	185 lb
Fuse	15 A

Water consumption

25,2 gal/100 lb

Sizes (WxDxH) \*

29 1/16" x 23 10/16" x 33 8/16"

Sizes with pack (WxDxH)

30 11/16" x 25 3/16" x 39 15/16"

Finish

AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 9/16" - 8 11/16" - 3/4"
- ② Water out: 2 2/16" - 7 1/16" - 15/16"
- ③ Electrical connections: 6 5/16" - 10 1/16"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"



# B-Qube




## THE GLAMOUR MADE CUBE

Fashionable look for trendy drinks with indisputable charm.

A cube that maintains the high quality and unmistakable Brema transparency, combined with a noteworthy resistance: during the shaking it does not break, does not melt and the angles work well in the mixer.

A sort of art form in the world of bartending.

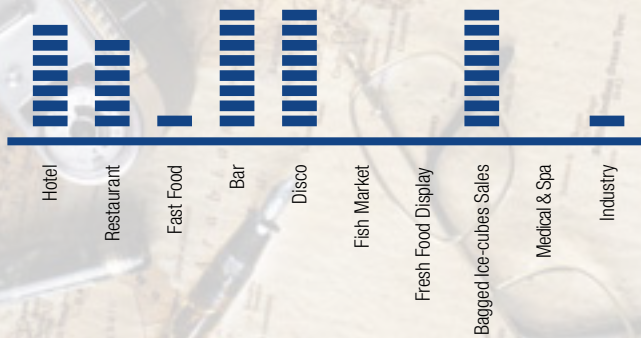

## CB 249A HC USA B-QUBE

### Daily production up to 82 lb Features & Plus




- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



### Technical information

Production 24h*	65 lb
Storage capacity	up to: 20 lb
Cooling system	A
Kind of cube	0.81 oz
Refrigerant	R290
Average power consumption**	320 W
Net weight	82 lb
Gross weight	97 lb
Fuse	10 A



Water consumption	29,2 gal/100 lb
Sizes (WxDxH) *	15 6/16" x 18 2/16" x 27 3/16"
Sizes with pack (WxDxH)	17 5/16" x 20 8/16" x 34 10/16"
Finish	AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 6/16" - 6 14/16" - 3/4"
- ② Water out: 1 15/16" - 5 2/16" - 15/16"
- ③ Electrical connections: 6 2/16" - 8 5/16"



Installation

Standard Voltage 115 V ~ 60 Hz  
\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F  
• Foot 3/16"

## CB 316A HC USA B-QUBE


### Daily production up to 90 lb Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



#### Technical information

Production 24h*	80 lb
Storage capacity	up to: 35 lb
Cooling system	A
Kind of cube	0.81 oz
Refrigerant	R290
Average power consumption**	325 W
Net weight	88 lb
Gross weight	106 lb
Fuse	10 A

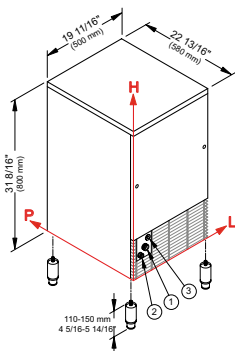

Water consumption	29,2 gal/100 lb
Sizes (WxDxH) *	19 11/16" x 22 13/16" x 31 8/16"
Sizes with pack (WxDxH)	21 10/16" x 24 13/16" x 39"
Finish	AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 6/16" - 7 11/16" - 3/4"
- ② Water out: 1 15/16" - 5 15/16" - 15/16"
- ③ Electrical connections: 6 2/16" - 9 2/16"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"

## CB 425A HC USA B-QUBE


### Daily production up to 110 lb Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



#### Technical information

Production 24h*	90 lb
Storage capacity	up to: 55 lb
Cooling system	A
Kind of cube	0.81 oz
Refrigerant	R290
Average power consumption**	380 W
Net weight	123 lb
Gross weight	141 lb
Fuse	10 A

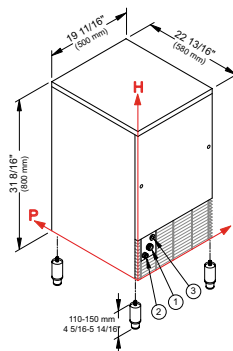

Water consumption	37,6 gal/100 lb
Sizes (WxDxH) *	19 11/16" x 22 13/16" x 31 8/16"
Sizes with pack (WxDxH)	21 10/16" x 24 13/16" x 39"
Finish	AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 6/16" - 7 11/16" - 3/4"
- ② Water out: 1 15/16" - 5 15/16" - 15/16"
- ③ Electrical connections: 6 2/16" - 9 2/16"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F


\*\* Adjustable Foot 4 5/16" - 5 14/16"



CB 640A HC USA B-QUBE

Daily production up to 160 lb  
Features & Plus

- Compact and crystal cube
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF switch
- HFC Free
- Automatic Washing system



Technical information

Production 24h*	140 lb
Storage capacity	up to: 88 lb
Cooling system	A
Kind of cube	0.81 oz
Refrigerant	R290
Average power cosumption**	520 W
Net weight	170 lb
Gross weight	196 lb
Fuse	15 A

Water consumption

25,2 gal/100 lb

Sizes (WxDxH) \*

29 1/16" x 23 10/16" x 36 4/16"

Sizes with pack (WxDxH)

30 11/16" x 25 3/16" x 42 11/16"

Finish

AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 9/16" - 11 4/16" - 3/4"
- ② Water out: 2 2/16" - 9 10/16" - 15/16"
- ③ Electrical connections: 6 5/16" - 12 10/16"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"



# Ice Pebbles



## MULTI PURPOSE ICE

The main feature is its shape: a compromise between cube and granular ice, with reduced consumption, both electricity and water.

This is the ideal ice for the whole day from sunrise to sunset! Excellent for breakfast: it welcomes cheeses, fruit, yogurt, juices and drinks.

During lunch and dinner it is found in the company of shellfish, fish and salads.

At Happy Hour it shows off among the appetizers.



TB 852A HC USA


### Daily production up to 225 lb Features & Plus

- Pebble ice - 91% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- AISI 304 SS evaporator
- Air cooling system
- Easy Cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- HFC Free



### Technical information

Production 24h*	180 lb
Storage capacity	up to: 44 lb
Cooling system	A
Pebble Size	5/16" x 5/8" x 9/32"
Refrigerant	R290
Average power consumption**	450 W
Net weight	130 lb
Gross weight	148 lb
Fuse	15 A



Water consumption	12,0 gal/100lbs
Sizes (WxDxH) *	19 11/16" x 26" x 27 3/16"
Sizes with pack (WxDxH)	21 10/16" x 28 6/16" x 34 10/16"
Finish	AISI 301 Stainless Steel, Scotch Brite

- ① Water in: 3 14/16" - 6 4/16" - 3/4"
- ② Water out: 1 14/16" - 5 15/16" - 15/16"
- ③ Electrical connections: 3 7/16" - 9 1/16"



Installation

Standard Voltage 115 V ~ 60 Hz  
\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F  
\*\* Adjustable Foot 4 5/16" - 5 14/16"

## TB 1404A HC USA


### Daily production up to 345 lb Features & Plus

- Pebble ice - 91% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- AISI 304 SS evaporator
- Air cooling system
- Easy Cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- HFC Free



### Technical information

Production 24h*	300 lb
Storage capacity	up to: 88 lb
Cooling system	A
Pebble Size	5/16" x 5/8" x 9/32"
Refrigerant	R290
Average power consumption**	680 W
Net weight	198 lb
Gross weight	220 lb
Fuse	15 A



Water consumption

12,0 gal/100 lbs

Sizes (WxDxH) \*

29 1/16" x 27 3/16" x 33 8/16"

Sizes with pack (WxDxH)

30 11/16" x 28 15/16" x 39 15/16"

Finish

AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 4 2/16" - 7 3/16" - 3/4"
- ② Water out: 2 1/16" - 6 14/16" - 15/16"
- ③ Electrical connections: 3 10/16" - 10"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"

## TM 140A HC USA


### Daily production up to 308 lb Features & Plus

- Pebble ice - 91% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- AISI 304 SS evaporator
- Air cooling system
- Easy Cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- HFC Free



### Technical information

Production 24h*	287 lb
Cooling system	A
Pebble Size	5/16" x 5/8" x 9/32"
Refrigerant	R290
Average power consumption**	670 W
Net weight	139 lb
Gross weight	163 lb
Fuse	15 A



Water consumption

12,0 gal/100 lbs

Sizes (WxDxH) \*

22" - 22 6/16" - 23 10/16"

Sizes with pack (WxDxH)

25 6/16" - 25 6/16" - 31 14/16"

Finish

AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 3 3/16" - 4 12/16" - 3/4"
- ② Water out: 18 14/16" - 2 9/16" - 15/16"
- ③ Electrical connections: 2 11/16" - 11 7/16"



Installation


Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

## TM 250A HC USA

### Daily production up to 530 lb Features & Plus

- Pebble ice - 91% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- Adjustable Stainless Steel feet
- AISI 304 SS evaporator
- Air cooling system
- Easy Cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- HFC Free



### Technical information

Production 24h*	500 lb
Cooling system	A
Pebble Size	5/16" x 5/8" x 9/32"
Refrigerant	R290
Average power consumption**	1170 W
Net weight	183 lb
Gross weight	205 lb
Fuse	15 A

Water consumption

12,0 gal/100 lbs

Sizes (WxDxH) \*

22" - 22 6/16" - 27 6/16"

Sizes with pack (WxDxH)

25 6/16" - 25 6/16" - 35 13/16"

Finish

AISI 304 Stainless Steel, Scotch Brite

① Water in: 3 3/16" - 4 12/16" - 3/4"

② Water out: 18 14/16" - 2 9/16" - 15/16"

③ Electrical connections: 2 11/16" - 11 7/16"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F





# Ice Flakes

## COLD IN THE SHOWCASE

The exhibition ice.

Sought after by those who work in catering, because it is not only a complement to drinks, but also plays an important role in table service.

Pleasant, versatile and decorative, it always wants to be in the foreground, to present and accompany tempting dishes and fresh foods.

Appreciated by fishmongers and self-service shops where a scenographic and correct exposure is a determining factor.

Particularly suitable also in the wellness, sports and medical sectors.



GB 903A HC USA


### Daily production up to 265 lb Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- AISI 304 SS evaporator
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- HFC Free



### Technical information

Production 24h*	210 lb
Storage capacity	up to: 66 lb
Cooling system	A
Refrigerant	R290
Average power consumption**	450 W
Net weight	148 lb
Gross weight	168 lb
Fuse	15 A



Water consumption	12,0 gal/100 lbs
Sizes (WxDxH) *	19 11/16" - 26" - 31 8/16"
Sizes with pack (WxDxH)	21 10/16" - 28 6/16" - 39"
Finish	AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 3 14/16" - 6 4/16" - 3/4"
- ② Water out: 1 14/16" - 5 15/16" - 15/16"
- ③ Electrical connections: 3 7/16" - 9 1/16"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"

## GB 1504A HC USA


### Daily production up to 385 lb Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- AISI 304 SS evaporator
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- HFC Free



#### Technical information

Production 24h*	335 lb
Storage capacity	up to: 88 lb
Cooling system	A
Refrigerant	R290
Average power consumption**	680 W
Net weight	187 lb
Gross weight	209 lb
Fuse	15 A



Water consumption	12,0 gal/100 lbs
Sizes (WxDxH) *	29 1/16" - 27 3/16" - 33 8/16"
Sizes with pack (WxDxH)	30 11/16" - 28 15/16" - 39 15/16"
Finish	AISI 304 Stainless Steel, Scotch Brite

- Water in: 4 2/16" - 7 3/16" - 3/4"
- Water out: 2 1/16" - 6 14/16" - 15/16"
- Electrical connections: 3 10/16" - 10"



Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F

\*\* Adjustable Foot 4 5/16" - 5 14/16"

## G 160A HC USA


### Daily production up to 399 lb Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- AISI 304 SS evaporator
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- HFC Free



#### Technical information

Production 24h*	368 lb
Cooling system	A
Refrigerant	R290
Average power consumption**	665 W
Net weight	139 lb
Gross weight	163 lb
Fuse	10 A



Water consumption	12,0 gal/100 lbs
Sizes (WxDxH) *	22" - 22 6/16" - 23 10/16"
Sizes with pack (WxDxH)	25 6/16" - 25 6/16" - 31 14/16"
Finish	AISI 304 Stainless Steel, Scotch Brite

- Water in: 3 3/16" - 4 12/16" - 3/4"
- Water out: 18 14/16" - 2 9/16" - 15/16"
- Electrical connections: 2 11/16" - 11 7/16"



Installation

Standard Voltage 115 V ~ 60 Hz


\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F



## G 280A HC USA

### Daily production up to 661 lb Features & Plus

- Granular ice - 80-82% dry
- 1l (water) - 1kg (ice)
- AISI 304 SS Scotch Brite finish
- AISI 304 SS evaporator
- Air cooling system
- Easy cleanable internal rounded surfaces
- HCFC-Free insulated storage
- Dust-proof water basin
- RoHS Free
- Disappearing insulated door
- Electromechanical operation
- ON-OFF rocker switch
- Automatic water charge
- HFC Free



#### Technical information

Production 24h*	617 lb
Cooling system	A
Refrigerant	R290
Average power consumption**	1100 W
Net weight	183 lb
Gross weight	205 lb
Fuse	15 A

Water consumption

12,0 gal/100 lbs

Sizes (WxDxH) \*

22" - 22 6/16" - 27 6/16"

Sizes with pack (WxDxH)

25 6/16" - 25 6/16" - 35 13/16"

Finish

AISI 304 Stainless Steel, Scotch Brite

- ① Water in: 3 3/16" - 4 12/16" - 3/4"
- ② Water out: 18 14/16" - 2 9/16" - 15/16"
- ③ Electrical connections: 2 11/16" - 11 7/16"






Installation

Standard Voltage 115 V ~ 60 Hz

\* Ambient temperature +90° F - Water temperature +70° F | \*\* Ambient temperature +109° F



# Kind of ice

Ice Cube	B-Qube	Ice Pebbles
		
<b>Cube</b> 0.46 oz <b>L</b> 1 3/16" <b>W</b> 1 1/32" <b>H</b> 1 9/64"	<b>Cube</b> 0.81 oz <b>L</b> 12 51/64" <b>W</b> 12 51/64" <b>H</b> 12 13/32"	<b>Pebble</b> <b>L</b> 5/16" <b>W</b> 5/8" <b>H</b> 9/32"

## List of icons



Sprayer System  
Technology



Pebbles System  
Technology



Granular System  
Technology



1l (water) - 1kg (ice)  
- only Air cooled



AISI 304 SS Scotch  
Brite finishing



Dust-proof  
water basin



Cleanable antiscall filter



Rotation sensor on low  
speed shaft



Easy cleanable internal  
rounded surfaces



ON/OFF rocker switch



HCFC-Free insulated  
storage



Automatic washing  
system



Electromechanical  
operation



Specific volume  
1 m<sup>3</sup> = 550 kg of ice



RoHS Free



R290 propane  
refrigerant

#bremaice

Models and specifications listed in this catalogue could be subject to change without prior notice.



[bremaice.it](http://bremaice.it)

